

Typical Applications:

- 1) Landscape/Landmark/Bridge/Architectural Lighting
- 2) Subway/MRT/Tunnel Lighting
- 3) Billboard/Advertisement Lighting
- 4) Harbor/Airport/Oil rig/Container Yard Lighting
- 5) Industrial Lighting (Petrochemical Plant, Factory & Facility etc.)
- 6) Sports Lighting (Golf Course, Tennis Court & Stadium etc.)



Features:

- 1) Super thin heat dissipation module & super power saving technologies .
- 2) Unique innovative light engine module design
- 3) High illumination efficiency & long lifetime; accomplishing energy-saving & carbon-reducing effectively.
- 4) Optimum optical design with no scattered light & comply with anti-glare regulations
- 5) High CRI value, typically >70
- 6) Rapid and easy replacement thanks to unique innovative design of light engine module
- 7) Comply with IP 65 standard




Specifications:

Color Options: Cool White/Natural White/Warm White

Product	Model No	Total Power Consum-ption (W)	Illumination* (lm, typ)	CRI* (typ)	View Angle	Operation Voltage (VAC)	Ambient temp. (°C)	Dimen. (mm) Wx HxD	Wgt. (kg)
High Power Spot Light Module	FD0501	105	6,600	≥ 70	typ. 15° or 40° or 60°	100 ~240	-20~45	717x 318x 85	9.0

Dimension (FD0501):

* Illumination , power consumption and CRI values vary w/ LED chips & viewing angles

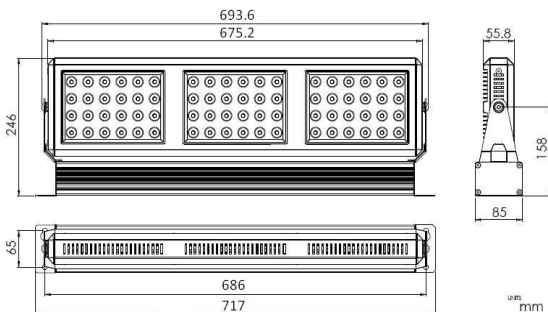

TOPUNION GLOBALTEK INC.

2F, No. 1-8, Li-Hsin Rd., Hsinchu Science Park;
Hsinchu, Taiwan; 30078, ROC

Tel: +886-3-666-9911; Fax: +886-3-666-9922

www.tgilighting.com; Contact: sales@tgilighting.com