



Typical Applications:

- 1) High Mast Lighting (@ 45m) for Harbor Container Yard
- 2) High Mast Lighting (>30m) for Off-shore oil rig/Airport
- 3) Highway Lighting applications (installed height @ 12m/15m)
- 4) Industrial Lighting (Petrochemical Plant, Factory & Facility etc.)
- 5) Sports Lighting (Golf Course, Tennis Court & Stadium etc.)
- 6) Landscape/Landmark/Bridge/Architectural Lighting

Features:

- 1) Super thin heat dissipation module & super power saving technologies .
- 2) Unique innovative light engine module design
- 3) High illumination efficiency & long lifetime; accomplishing energy-saving & carbon-reducing effectively.
- 4) Optimum optical design with no scattered light & comply with anti-glare regulations
- 5) High CRI value, typically >70
- 6) Rapid and easy replacement thanks to unique innovative design of light engine module
- 7) Street lights Comply with CNS 15233 & IP 65 standards




Specifications:

Color Options: Cool White/Neutral White/Warm White

Product	Model No	LED No	Power Consumption (W)	Illumination* (lm)	CRI* (typ)	Color Temp.	Operation Voltage (VDC)	Dimen. (mm) LxWxD	Wgt. (kg)
High Power Light Engine	LE0200B	24	40	3,350	≥ 70	Neutral White	24	217.0x 160.0x 37.6	1.0

* Illumination , power consumption and CRI values vary w/ LED chips & viewing angles

Dimension (LE0200B):

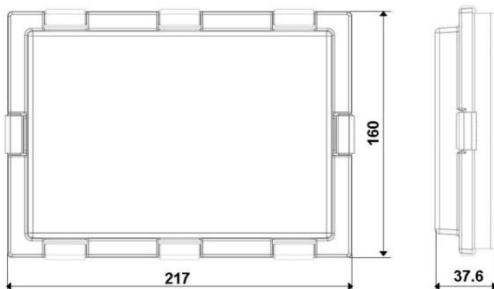

TOPUNION GLOBALTEK INC.

2F, No. 1-8, Li-Hsin Rd., Hsinchu Science Park;
Hsinchu, Taiwan; 30078, ROC

Tel: +886-3-666-9911; Fax: +886-3-666-9922

www.tgilighting.com; Contact: sales@tgilighting.com